


Request From: _____
Company Name: _____
Phone Number: _____
Email: _____

Project Name: _____
Project Address: _____
Ship to Address: _____
Location: ☐ Project ☐ Shop ☐ New Construction

PROFILE VIEW Insulated

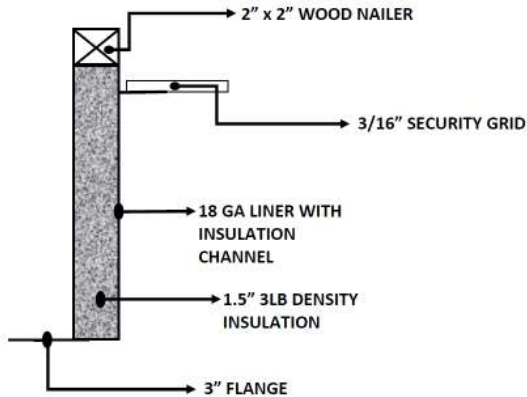

Standard Features Insulated Curb

- 18 Gauge, Galvanized steel construction
- 20 Gauge interior liner
- 1 1/2" thick, 3 pound density fiberglass insulation
- Full height mitered and welded corners
- 2"x2" wood nailer
- 3/16" Safety and Security Grid 6"x6" on center, mounted at top of curb
- Pre-primed white interior and grid
- 3" Flange on lower perimeter
- 1 1/2" Curb wall thickness

Insulated Curb Quantity: _____

Curb Outside Dimensions: _____ X _____

Curb Inside Dimensions: _____ X _____


Curb Height: ☐ 9" ☐ 12" ☐ 14" ☐ Custom _____

Product Type: ☐ Skylight ☐ Smoke Vent ☐ Shrink-Out S.V.
☐ Velux ☐ Sunoptics ☐ Kingspan ☐ _____

Additional Option Requested

- ☐ 14 Gauge 5" On Center One Direction
- ☐ Delete Safety Screen
- ☐ 1/2" Burglar Bars, 8" x 8" on center grid
- ☐ CalOSHA 4"x4" on center grid

PROFILE VIEW Non-Insulated

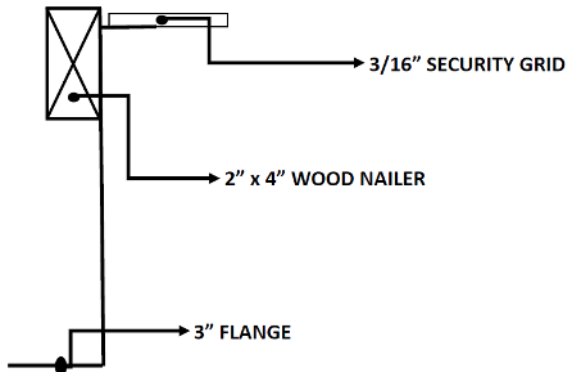

Standard Features Non-Insulated Curb

- 18 Gauge, Galvanized steel construction
- Full height mitered and welded corners
- 2"x4" wood nailer
- 3/16" Safety and Security Grid 6"x6" on center, mounted at top of curb
- Pre-primed white interior and grid
- 3" Flange on lower perimeter
- 1 3/4" Curb wall thickness
- Designed to be insulated in the field by Installer

Non-Insulated Curb Quantity: _____

Curb Outside Dimensions: _____ X _____

Curb Inside Dimensions: _____ X _____

Curb Height: 9" 12" 14" Custom _____

Product Type: ☐ Skylight ☐ Smoke Vent ☐ Shrink-Out S.V.

☐ Velux ☐ Sunoptics ☐ Kingspan ☐ _____

Additional Option Requested

- ☐ 14 Gauge 5" On Center One Direction
- ☐ Delete Safety Screen
- ☐ Add 1/2" Burglar Bars, 8" x 8" on center grid
- ☐ CalOSHA 4"x4" on center grid