

Drawing Date: 5/1/25

REV: 001

Approved By:





Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

Approved By: _____ Date: _____

NOTE:

STANDARD FEATURES:

1. 18ga Galvanized Construction
2. Corners Mitered and Welded Watertight.
3. Curbs Prime Painted after Fabrication.
4. 4x4 Water Cricket.
5. 9" Minimum Height,
6. Internal Angle Reinforcing
7. 18ga Liners
8. Weld-on SSR-Clips
9. 1 1/2" Thick, 3# Density Fiberglass Insulation.

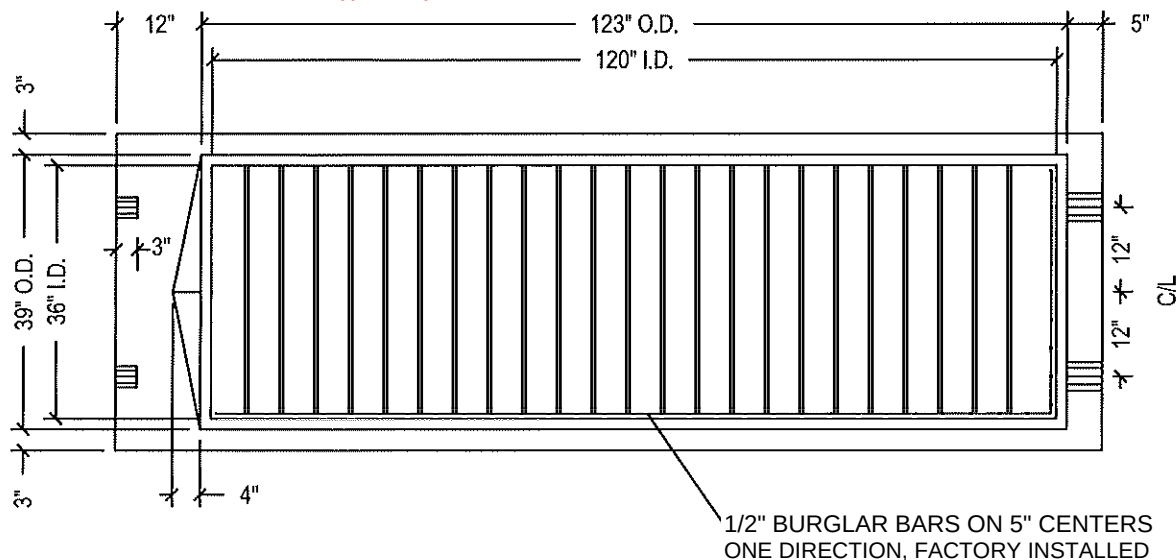

FLAT, NO SLOPE

CLIPS TO MATCH
THIS ROOF PANEL TBD SSR _____


Number of Over Clips Per Curb 2

Number of Over Clips Per Curb 2

NOTE: WELD ON CLIPS

The above curb requires sealant to be applied to cricket/ water-diverter.
Sealant for the cricket/water diverter, structural support and roof fasteners are by others (not included).

18ga LINERS
PAINTED WHITE

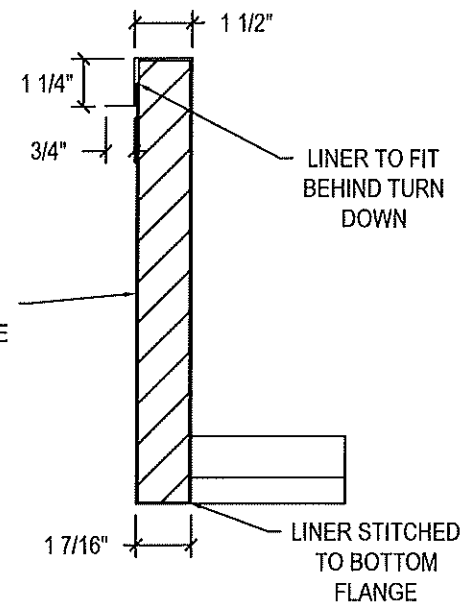

CURBS PLUS, INC.

CPM-3 METAL BLDG.

QTY.:
PROJECT NAME:
CITY, STATE:
CUSTOMER:
JOB NUMBER:
TAG:

Note: Design subject to change without notice.

File Name: 123.0 X 39.0 - 9.0 HEIGHT - NO SLOPE w LINERS - 5" BARS - SSR CLIPS

©2003 Curbs Plus, Inc.