

Safety Railing

ROOF HATCH FALL PROTECTION

Babcock-Davis OSHA compliant Safety Railing is ideal for new and retrofit applications. The safety railing mounts to the existing roof hatch curb counterflash without penetrating the membrane or curb.

FEATURES

EASY FIELD INSTALLATION No field cutting required as rails are cut to exact size. Easy assembly fittings and quick mounting on counterflash using a patented nut backing plate.

SELF CLOSING GATE (shown) Designed to automatically close, the gate is constructed with spring loaded hinges to protect against falls.

OPTIONAL CHAIN CLOSURE Comes with standard chain barrier with easy spring clip attachment to guard against falls. (Not OSHA compliant)



Safety Yellow Powder Coat option shown

DETAILS

MATERIAL Rails and posts, aluminum, 1-1/4 inch ID (1.66 inch OD) Schedule 40 pipe

FINISH Powder Coat, Safety Yellow or Mill

FITTINGS Cast aluminum alloy with set screw hold


MOUNTING BRACKETS 3/16 inch steel, zinc-plated with nut backing plate

HARDWARE Hex head bolts 3/8 - 16 by 3/4 inch zinc-plated steel

EXIT Must be kept closed when roof hatch door is open

- Self-Closing Gate: Aluminum, 1-1/4 inch ID (1.66 inch OD) Schedule 40 pipe, self-closing with coil spring

COMPLIANCE OSHA 29 CFR 1910.29, 1910.28, 1910.23, 1926.502 and 1926.501

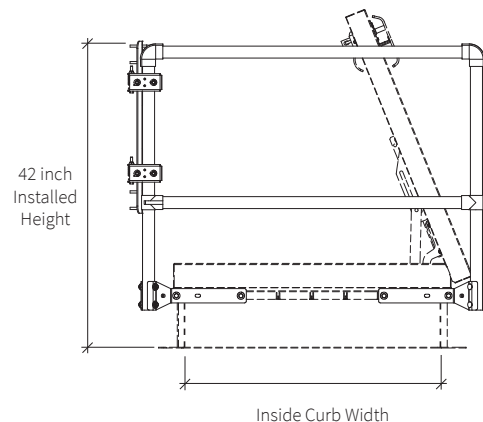

STANDARD MODELS

GATE CLOSURE			
YELLOW	MILL	SIZE (IN.)	ACCESS
SRCA36X30FG	SRCA36X30FG	36 x 30	Front
SRCA36X36SG	SRCA36X36SG	36 x 36	Front
SRCA48X48FG	SRCA48X48FG	48 x 48	Front
SRCA30X54SG	SRCA30X54SG	30 x 54	Side
SRCA30X72SG	SRCA30X72SG	30 x 72	Side
SRCA30X96SG	SRCA30X96SG	30 x 96	Side

Additional sizes available, call for more information.

THERMALMAX™ MODELS

GATE CLOSURE			
YELLOW	MILL	SIZE (IN.)	ACCESS
SRBAY36X30FG	SRBA36X30FG	36 x 30	Front
SRBAY36X36FG	SRBA36X36SG	36 x 36	Front
SRBAY48X48FG	SRBA48X48FG	48 x 48	Front
SRBAY30X54SG	SRBA30X54SG	30 x 54	Side
SRBAY30X96SG	SRBA30X96SG	30 x 96	Side