

GLAZING TYPE

ACRYLIC DOUBLE DOME(S) ☐

POLYCARBONATE DOUBLE DOME(S) ☒

DOME COLORS (outer/ inner)

	Approx Light Transmission
CLEAR/ CLEAR	☐ 84%
BRONZE/ CLEAR	☐ 25%
BRONZE/ BRONZE	☐ 7%
CLEAR/ STANDARD WHITE	☒ 27%
STANDARD WHITE/ CLEAR	☐ 27%
OTHER ☐	

FRAME FINISH

MILL FINISH ☒

BRONZE PAINTED ☐

WHITE PAINTED ☐

CLEAR ANODIZED ☐

OTHER ☐

SKYLIGHT DIMENSION

EXISTING CURB DIM ☐

OR


ID SKYLIGHT FRAME DIM ☒

QTY =

SIZE =

51.5x51.5

MODEL TBCM - Thermal Break Curb Mount

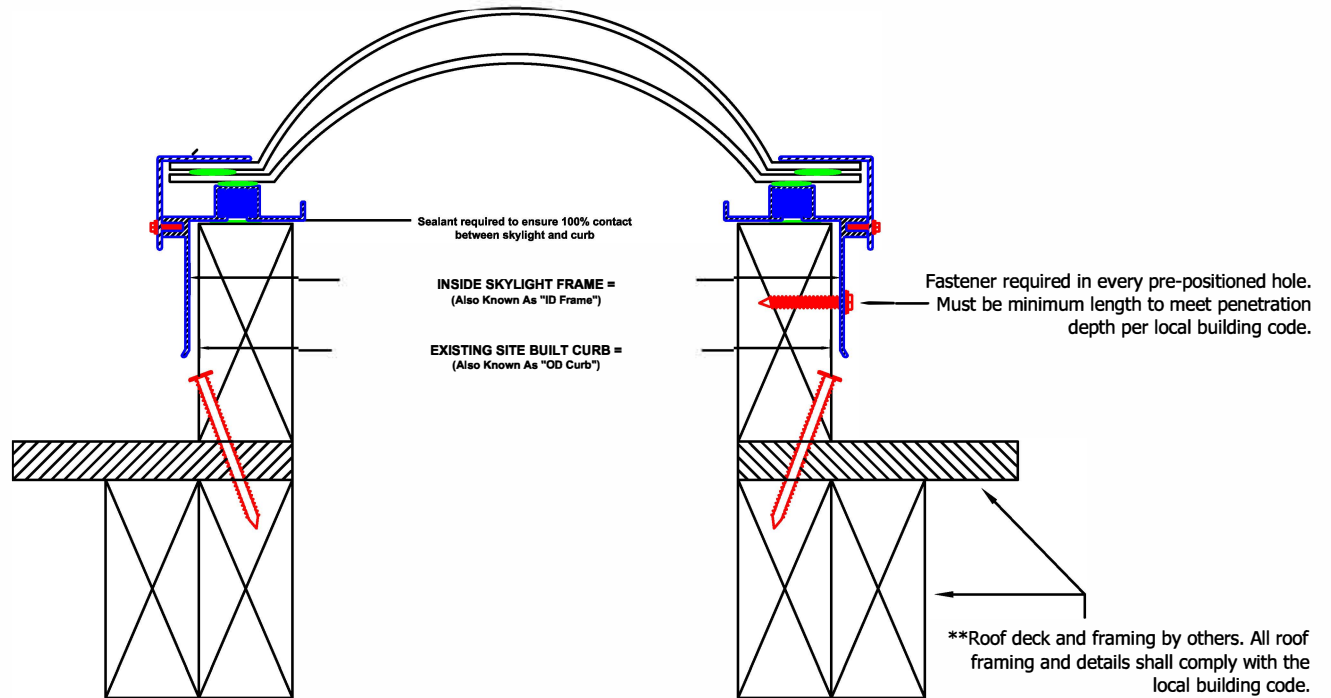

Miami-Dade NOA 24-0401.06 • 8th Edition 2023 FBC • NAMI Certified

**Tested and conforming to AAMA/WDMA/CSA 101/I.S.2/A440-08

**Tested and conforming to ASTM E1886-05 & ASTM 1996-05 Missile Level D, Wind Zone 4

**Meets 2017 OSHA Fall Protection guidelines with no additional coverage/screen required

OSHA 1910.28(b)(3)(i), 1910.28(b)(3)(i)(A), 1910.29(e)(l), 1910.29(e)(2); glazed opening is capable of supporting, without failure, at least twice the maximum intended load that may be imposed on the cover at any one time and glazing is secured to prevent accidental displacement. Maxim Test loads= minimum 900 ft/lbs up to >3000 ft/lbs

**Units can be submitted under Miami-Dade NOA or FBC Approval



Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

Approved By: _____ Date: _____

Birdview
SKYLIGHTS