

GLAZING TYPE

ACRYLIC DOUBLE DOME(S) ☐

POLYCARBONATE DOUBLE DOME(S) ☐

DOME COLORS (outer/ inner)

		Approx Light Transmission
CLEAR/ CLEAR	☐	84%
BRONZE/ CLEAR	☐	25%
BRONZE/ BRONZE	☐	7%
CLEAR/ STANDARD WHITE	☒	27%
STANDARD WHITE/ CLEAR	☐	27%

OTHER ☐

FRAME FINISH

MILL FINISH ☒

BRONZE PAINTED ☐

WHITE PAINTED ☐

CLEAR ANODIZED ☐

OTHER ☐

SKYLIGHT DIMENSION


EXISTING CURB DIM ☐ OR

ID SKYLIGHT FRAME DIM ☒

QTY =

SIZE = **51.5x51.5**

MODEL TBCM - Thermal Break Curb Mount

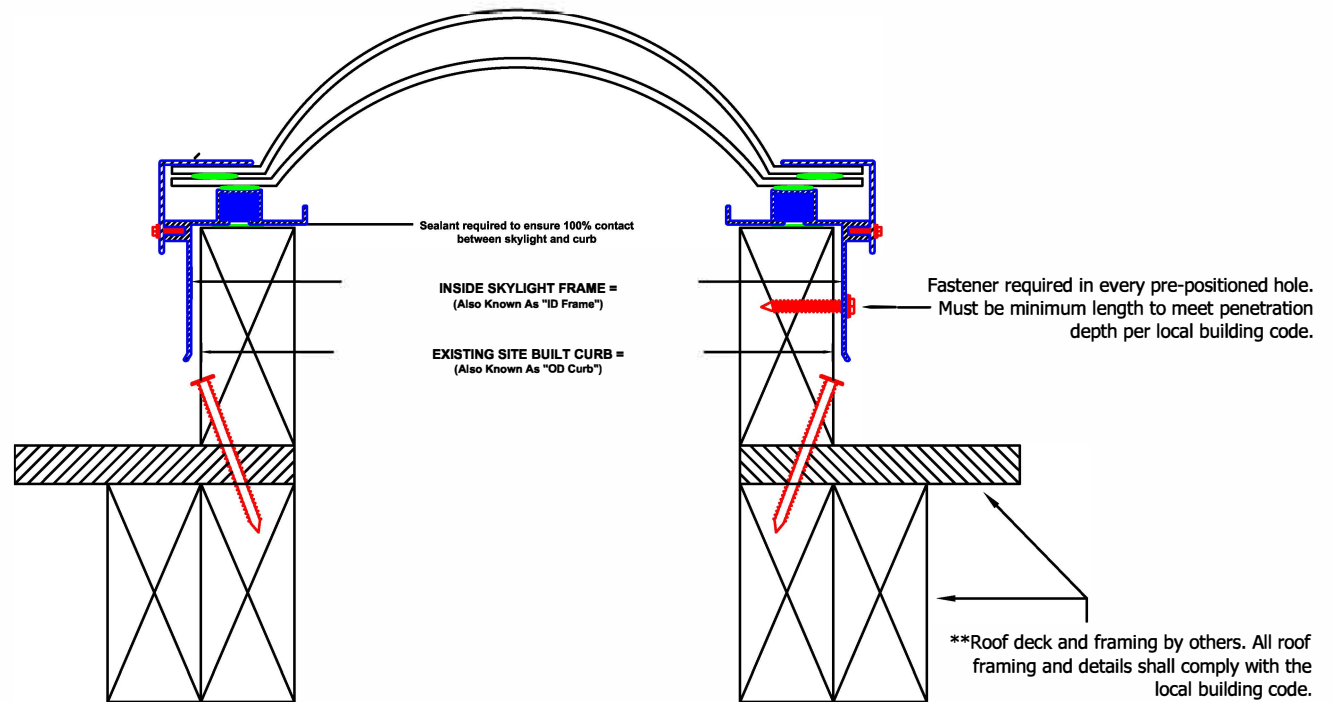

TESTING & CERTIFICATIONS

**Tested and conforming to AAMA/WDMN/CSA 101/I.S.2/A440-08

**North American Fenestration Standard/Specification for Skylights

**Air Penetration = <0.01 cfm/ft²

**Water Penetration = 9.19psf

**U-Factor = 0.73 (NFRC 100 200) ; SHGC = 0.28 (NFRC 200 2010)

**Design Pressure = ± 60.15psf



Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

Approved By: _____ Date: _____

Birdview SKYLIGHTS