





Right Side View

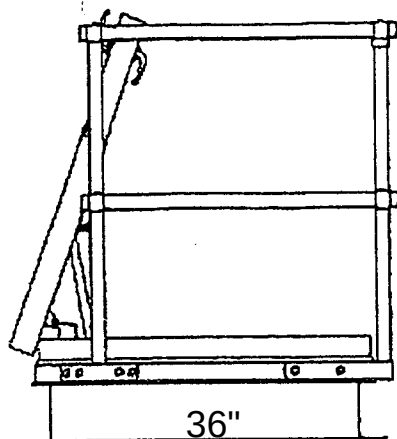

Frontal View

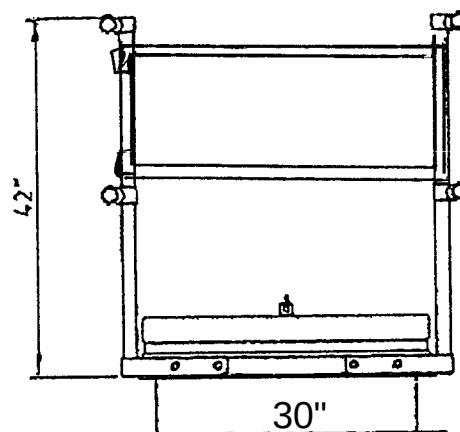

Left Side View

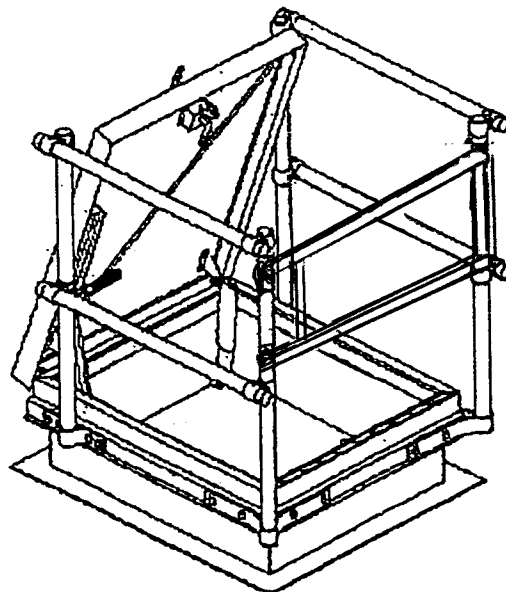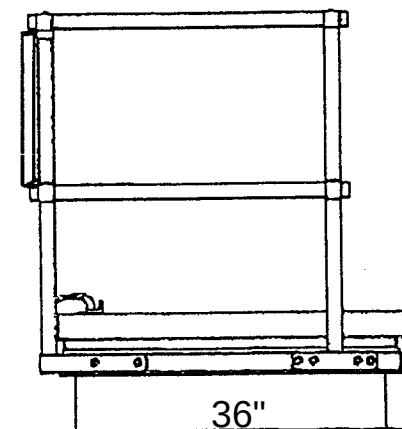

Roof Hatch

Roof hatch shall be of the Railing Ready® design with pre-drilled holes on cap flashing of hatch for mounting KeeHatch Railing System brackets. Roof hatch curb flashing shall not be penetrated.

Dur-Red Products Distributor: Logistics Lighting - We Are Skylight Experts  
Phone: 307-633-9696 - Toll Free: 844-455-7283 - Email: Sales@LogisticsLighting.com

Materials:

Pipe: 1 1/4" ID A53 Grade B seamed steel.  
Finish: Galvanized (hot dipped).

WITH SELF CLOSING GATE

Pipe plugs: Weather and light resistant for pipe ends.  
Bolts: Hex head bolts 3/8", grade Z, zinc plated with manufacturer's standard washers inside and outside  
Railing fittings: Manufacturer's standard cast fittings, galvanized.  
Sealant for brackets: Manufacturer's standard.

## DUR-RED PRODUCTS

|            |                                   |
|------------|-----------------------------------|
| JOB:       | SHEET<br>1 OF 1<br>DWG No<br>RHSR |
| ARCH:      |                                   |
| CONTR:     |                                   |
| SUB-CONTR: |                                   |
| DATE:      |                                   |