
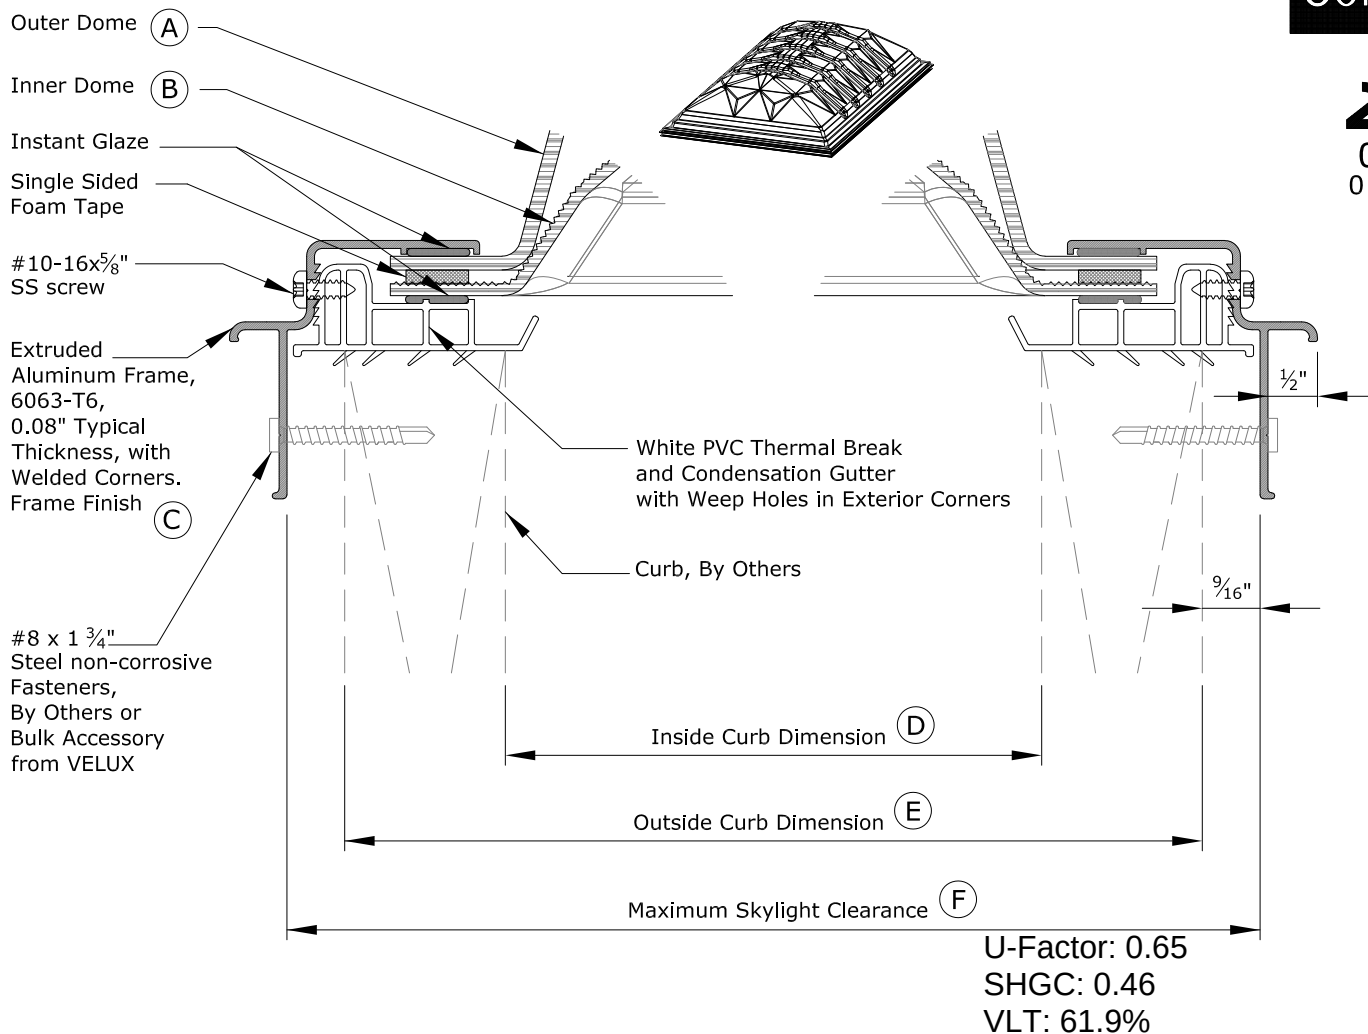


# Curb Mount Dynamic Double Dome Prismatic CMD2

**VELUX**

**Commercial**



Material # **CMD2 2448 P1C2M**

## Skylight Details & Measurements

- (A) LuxGuard 118 clear smooth Polycarbonate
- (B) 118 white prismatic Polycarbonate
- (C) Mill Finish
- (D) 24 in. x 48 in.
- (E) 27 in. x 51 in.
- (F) 28.25 in. x 52.25 in.

## Skylight Testing & Certification

Thermal (NFRC) Certification  
Factory Mutual (FM)  
Air/Water/Structural Certification  
ICC-ES ESR 4108

OSHA Static Load Fall Protection: Skylight model tested to support a maximum concentrated load up to 1000 Lbf  
OSHA Dynamic Load Fall Protection: Skylight model tested to support a maximum dropped load up to 1600 Lbf-ft

**LOGISTICS LIGHTING**  
WE ARE SKYLIGHT EXPERTS

Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_