


Curb Mount Dynamic Double Dome Prismatic CMD2

VELUX

Commercial



0° - 60°
0:12 - 20:12

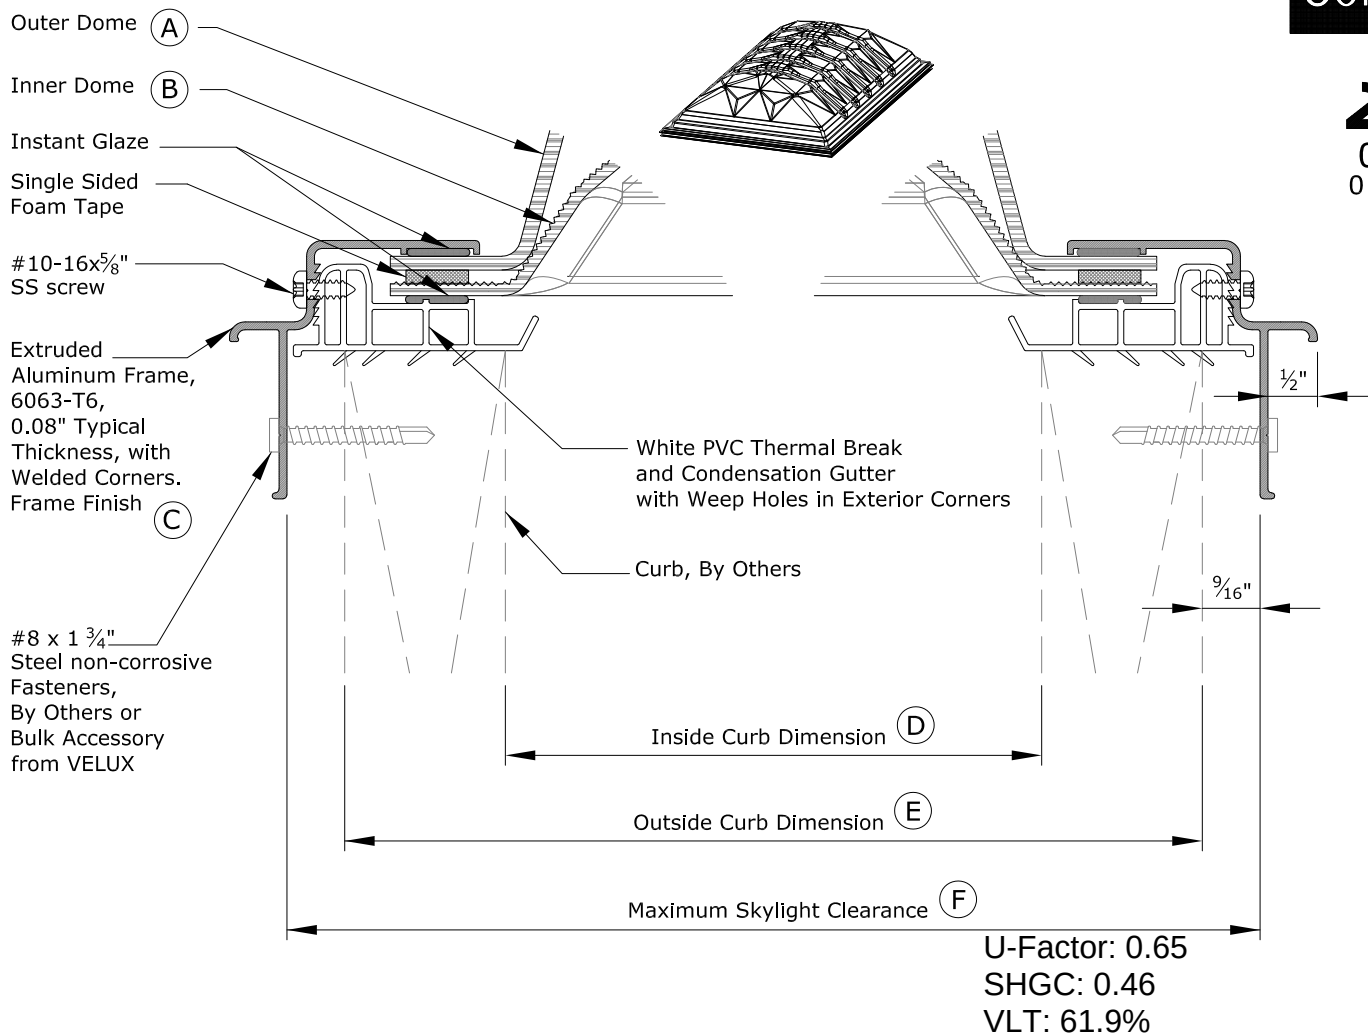

Material # CMD2 4860 P1C2M

Skylight Details & Measurements

- (A) LuxGuard 118 clear smooth Polycarbonate
- (B) 118 white prismatic Polycarbonate
- (C) Mill Finish
- (D) 48 in. x 60 in.
- (E) 51 in. x 63 in.
- (F) 52.5 in. x 64.5 in.

Skylight Testing & Certification

Thermal (NFRC) Certification
Factory Mutual (FM)
Air/Water/Structural Certification
ICC-ES ESR 4108

OSHA Static Load Fall Protection: Skylight model tested to support a maximum concentrated load up to 1000 Lbf
OSHA Dynamic Load Fall Protection: Skylight model tested to support a maximum dropped load up to 1600 Lbf-ft

LOGISTICS LIGHTING
WE ARE SKYLIGHT EXPERTS

Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

LL#:

QTY:

APPROVED BY: _____

DATE: _____