
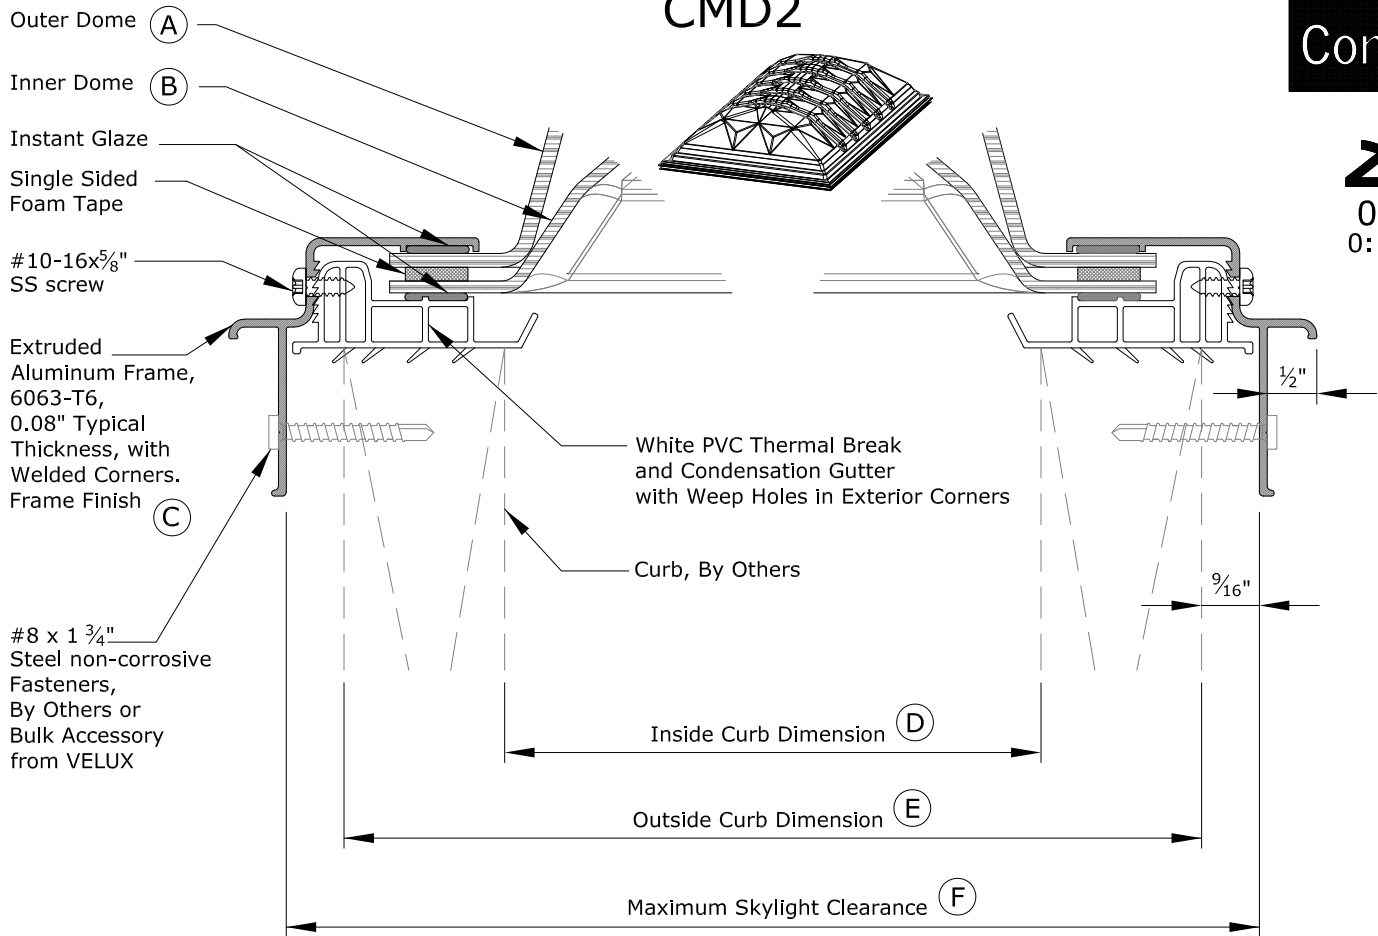


# Curb Mount Dynamic Double Dome

## CMD2

**VELUX****Commercial**

U-Factor: 0.65  
SHGC: 0.37  
VLT: 56.8%

## Skylight Details & Measurements

- (A) 118 Satin Sky 2 acrylic
- (B) 118 clear smooth acrylic
- (C) Mill Finish
- (D) 48 in. x 96 in.
- (E) 51 in. x 99 in.
- (F) 52.5 in. x 100.5 in.

## Skylight Testing & Certification

Thermal (NFRC) Certification

Air/Water/Structural Certification

OSHA Static Load Fall Protection: Skylight model tested to support a maximum concentrated load up to 1000 Lbf

OSHA Dynamic Load Fall Protection: Skylight model tested to support a maximum dropped load up to 300 Lbf-ft

Material # CMD2 4896 E2A1M



Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

QTY:

LL#

Project Location:

Approved By: \_\_\_\_\_ Date: \_\_\_\_\_