

Curb Mount Dynamic Double Dome


CMD2

VELUX

Commercial



0° - 60°
0:12 - 20:12

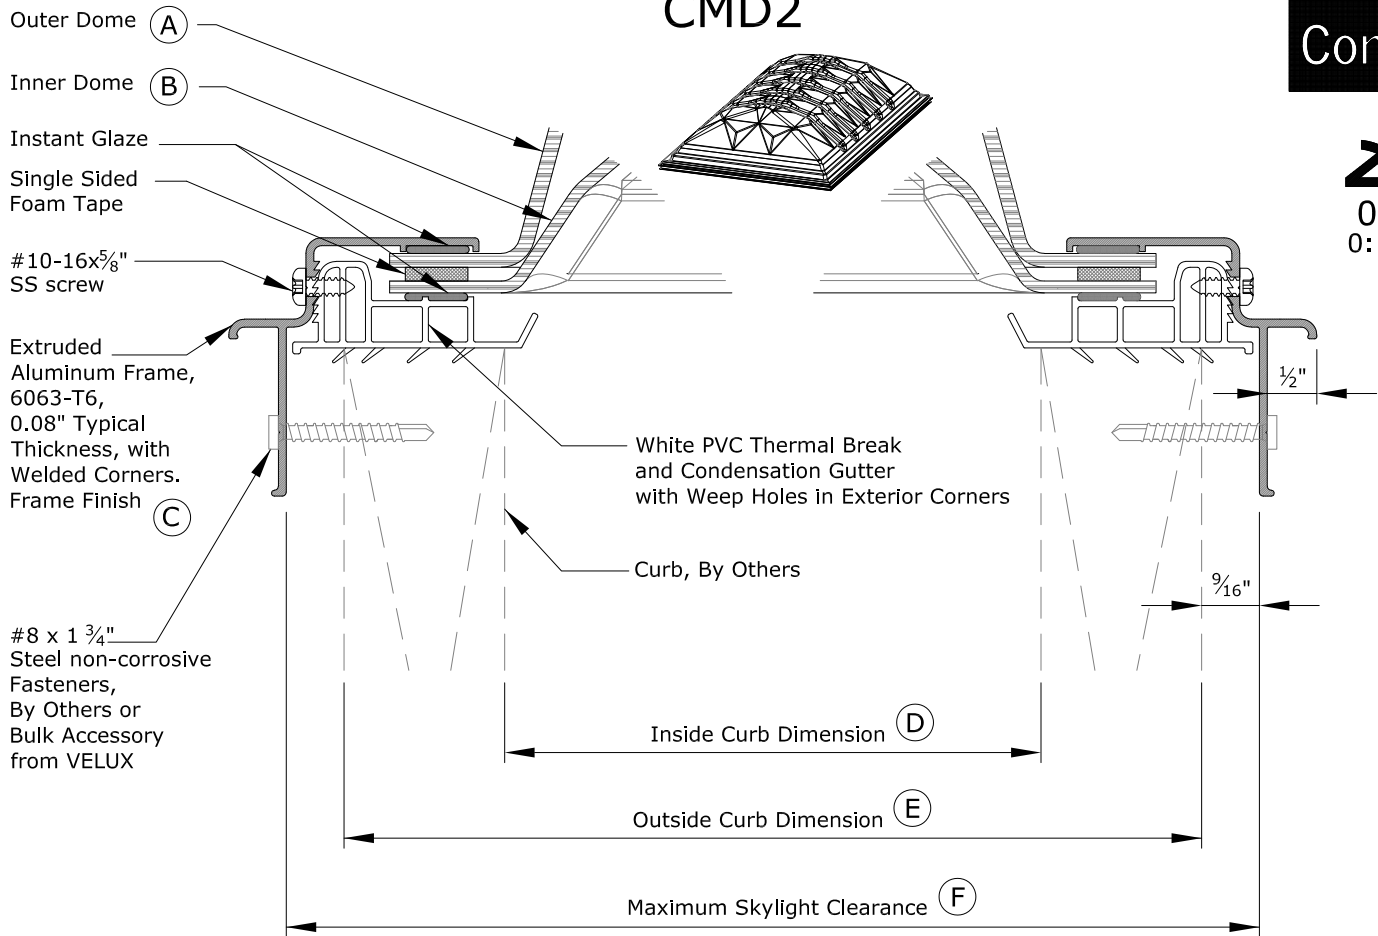

U-Factor: 0.65
SHGC: 0.49
VLT: 66.4%

Material # **CMD2 7272 P1P2**

Skylight Details & Measurements

- (A) LuxGuard 118 clear smooth Polycarbonate
- (B) 118 white smooth Polycarbonate
- (C) Mill Finish
- (D) 72 in. x 72 in.
- (E) 75 in. x 75 in.
- (F) 76.5 in. x 76.5 in.

Skylight Testing & Certification

Thermal (NFRC) Certification
Factory Mutual (FM)

Air/Water/Structural Certification

OSHA Static Load Fall Protection: Skylight model tested to support a maximum concentrated load up to 1000 Lbf

OSHA Dynamic Load Fall Protection: Skylight model tested to support a maximum dropped load up to 2000 Lbf-ft

LOGISTICS LIGHTING
WE ARE SKYLIGHT EXPERTS

Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

LL#:

QTY:

APPROVED BY: _____

DATE: _____