
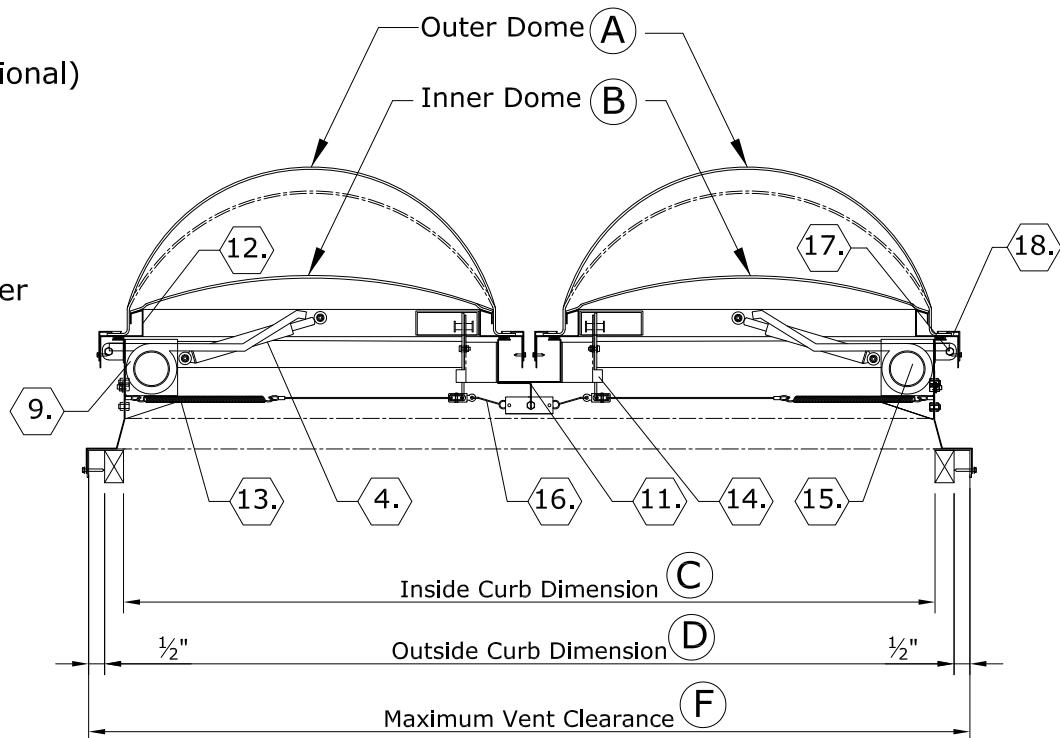


ULSV2DCM DOUBLE DOME SMOKE VENT

VELUX

Commercial

1. Double Glazed
2. Galv. Steel Dome Frame
3. Dual Wall
4. Shock Absorber
5. Shock Channel Bracket @ Lid
6. Galv. Stl. Shock Bracket @ Base
7. Exterior Manual Release
8. Interior Manual Release (Optional)
9. Spring
10. Fusible Link
11. Galv. Steel Mid Channel Gutter
12. EPDM Gasket
13. Tension Spring
14. Latch Assembly
15. Galv. Steel Bracket
16. Pulley
17. Hinge Assembly
18. Galv. Steel Self Flashing Frame

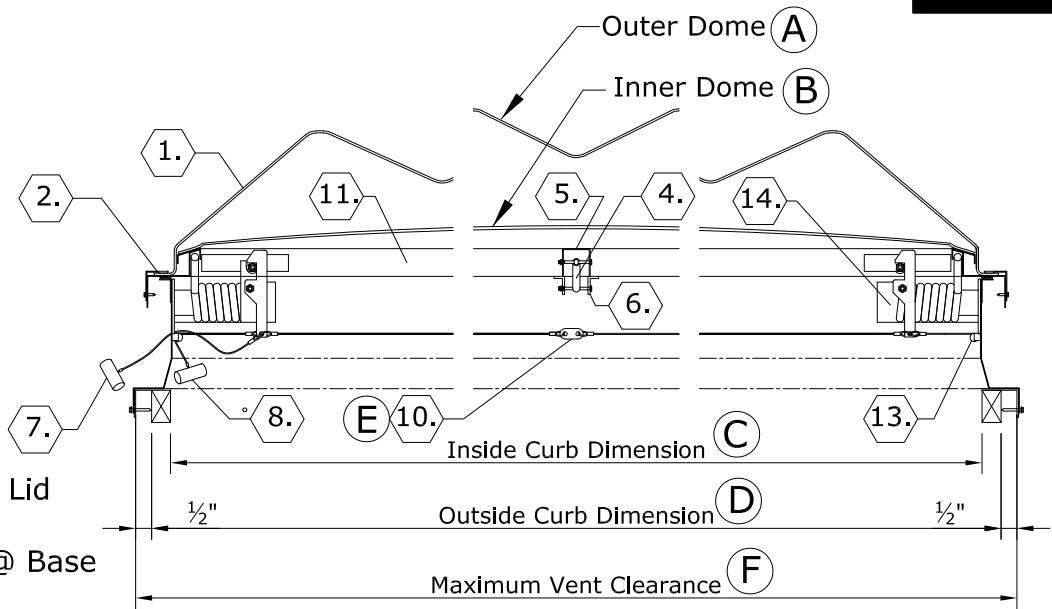

Roof Pitch 0-60 Degrees

ULSV2DCM_4896S2EM

Note: Vent covers open with internal and external manual pull handles.

Skylight Details & Measurements

- (A) Outer Dome Clear polycarbonate, 0.118-in thickness
 (B) Inner Dome White prismatic impact modified acrylic, 0.177-in thickn
 (C) Inside Curb Dimension 48 in x 96 in
 (D) Outside Curb Dimension 51 in x 99 in
 (E) Fusible Link Temperature 360F
 (F) Maximum Vent Clearance 52 in x 100 in
 Smoke Vent UL Listed

LL#:

QTY:

LOGISTICS LIGHTING
WE ARE SKYLIGHT EXPERTS

Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

Approved By: _____ Date: _____