

8	7	6	5	4	3	2	1
PROJECT REF: _____ CONTRACTOR: _____ APPROVED BY: _____ SIGN HERE: _____		LADDER KITS UNDER 24'		ANY KIT OVER 24' WILL REQUIRE VERTICAL FALL ARREST.			
		CODE	HEIGHTS UP TO	NOTE (A): AS PER OSHA 1910.28(b)(a)(i)(B), FIXED LADDERS THAT EXTEND MORE THAN 24' MUST BE EQUIPPED WITH A PERSONAL FALL ARREST SYSTEM OR LADDER SAFETY SYSTEM			
		RL34.094	94" (7'-10")				
		RL34.141	141" (11'-9")				
		RL34.188	188" (15'-8")				
		RL34.235	235" (19'-7")				
		RL34.282	282" (23'-6")				



Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

Approved By: _____ Date: _____

ALUMINUM RETRACTABLE STILES
GRADE 6000 SERIES
(2'-¼" x 1'-½" x ⅛")
NOTE: SHOWN IN 'OPEN POSITION'

LD421.280 WALL FIXING BRACKET
AS STANDARD. OTHER FIXING BRACKETS
AVAILABLE TO MEET SPECIFIC APPLICATIONS


LADDER BODY CONNECTED WITH
SPLICE JOIN. SEE TYP. DETAIL
FOR FURTHER INFORMATION

1'-¼" SQ. SERRATED RUNG (TYP)
ALUMINUM 6000 SERIES,
WELDED TO STILES


LADDER SUPPLIED IN KIT FORM.
LADDER BASE IS DESIGNED TO BE
CUT TO REQ. HEIGHT ON-SITE.
TOP RUNG MUST BE LEVEL WITH
WALKING/WORKING SURFACE OR PLATFORM

FLOOR SUBSTRATE TYPE (D)

LD419S FLOOR MOUNT
BRACKET SHOWN
VARIOUS MOUNTING
OPTIONS AVAILABLE

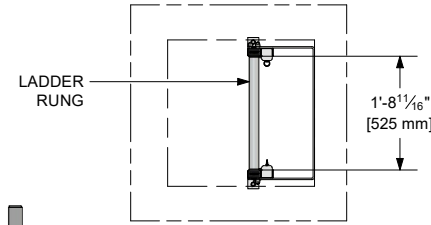

TOP VIEW

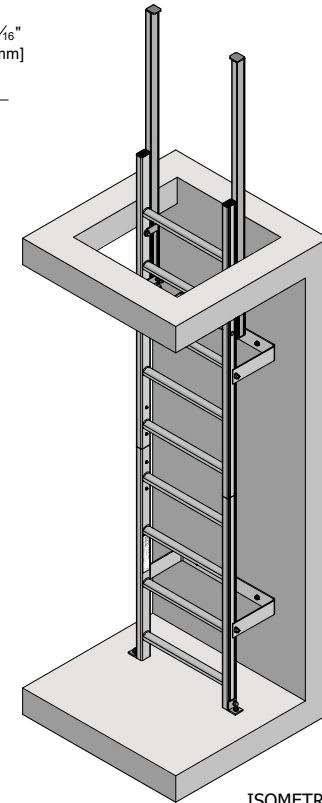

ISOMETRIC VIEW

- A _____
LOWER LEVEL TO UPPER LEVEL WALKING/WORKING HEIGHT
- B _____
WALL SUBSTRATE TYPE (I.E BRICK, CONCRETE BLOCK, METAL SIDING, ETC)
- C _____
WALL TO CENTERLINE OF LADDER. OSHA 1910.23(D)(2) STATES THAT THE DISTANCE FROM THE CENTERLINE OF THE RUNGS TO THE NEAREST PERMANENT OBJECT SHALL NOT BE LESS THAN 7in. OSHA ALSO REQUIRES A PLATFORM IF THE DISTANCE EXCEEDS 12in. PLEASE STATE WIDTH OF ANY GUTTER OR OBJECT (E.G. GUTTER 9in WIDE). KATTSafe WILL ENSURE THAT THE CORRECT BRACKET IS PROVIDED
- D _____
FLOOR SUBSTRATE TYPE (I.E. ROOF MEMBRANE, CONCRETE, METAL ROOF, ETC.)

ALL DIMENSIONS IN FEET AND INCHES			
REV	DATE	BY	COMMENTS
8			
7			
6			

Kattsafe®

DESCRIPTION VERTICAL FIXED LADDER W/ RETRACTABLE STILE		PRODUCT CODE RL34		1:30	PAGE 4 OF 5
MATERIAL ALUMINUM		FINISH MILL FINISH		DRN: LFP DATE: 04/13/2024 DWG No.	SIZE: A REV.