

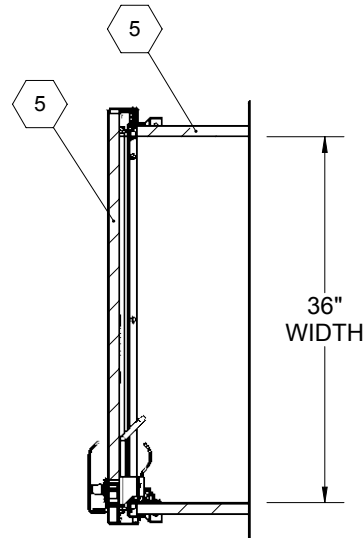


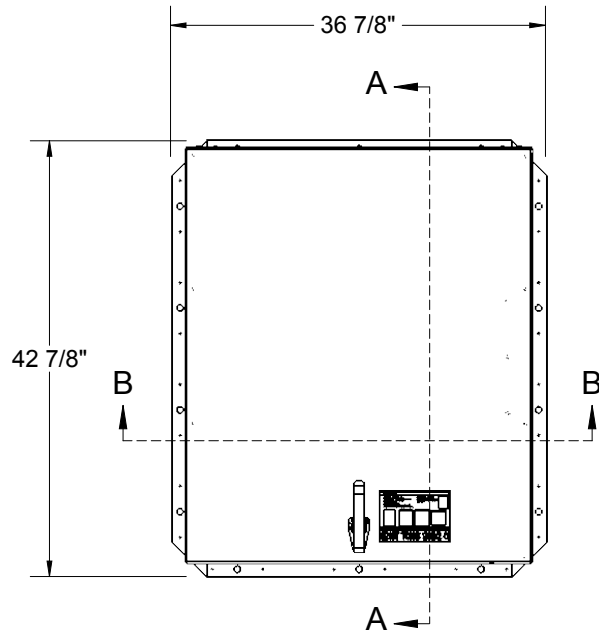

SECTION A-A

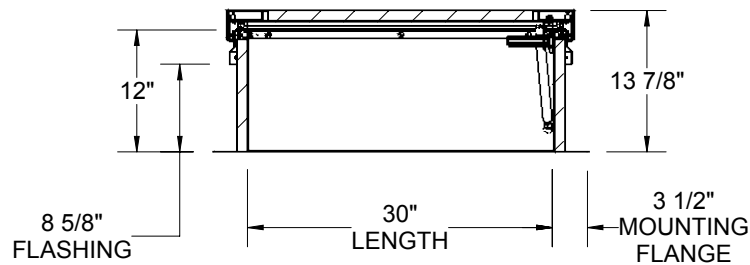

SECTION B-B

SPECIFICATIONS:

- ① **COVER:**
11 GA (.090) ALUM, STIFFENED TO WITHSTAND A LIVE LOAD OF 40PSF WITH A MAX DEFLECTION OF 1/150 OF THE SPAN.
- ② **LINER:** 18 GA (.040) ALUM
- ③ **CURB:** 11 GA (.090) ALUM, CURB COUNTERFLASH WITH EZ TABS.
- ④ **FINISH:** MILL
- ⑤ **INSULATION:** 1" POLYISO R-6 (5.6 LTTR) IN CURB,
1" POLYSTYRENE R-4 (3.8 LTTR) IN COVER.
- ⑥ **GASKET:**
EXTRUDED EPDM RUBBER ADHESIVE BACKED GASKET SEAL CONTINUOUS AROUND COVER.
- ⑦ **SPRING:**
GAS SPRING WITH DAMPER FOR SMOOTH, CONTROLLED, COUNTERBALANCED LIFT ASSISTANCE.
- ⑧ **HINGE:** PINTLE HINGE WITH STAINLESS STEEL HINGE PINS.
- ⑨ **HOLD OPEN ARM:**
ZINC PLATED STEEL AUTOMATIC HOLD OPEN ARM LOCKS COVER IN FULLY OPEN POSITION WITH RED GRIP HANDLE PULL RELEASE.

⑩ LATCH:

ZINC PLATED STEEL SLAM LATCH, HOLDS COVERS CLOSED AGAINST WIND UPLIFT, INTERIOR AND EXTERIOR HANDLES WITH PADLOCK HASPS.

⑪ PULL HANDLE:

INTERIOR PULL DOWN HANDLE, SAFETY YELLOW POWDER COAT.

NOTES:


- WHEN INSTALLING ON A PITCHED ROOF UP TO 7:12, THE HINGE SIDE(LENGTH) MUST BE PARALLEL TO THE SLOPE.
- WIDTH X LENGTH DIMENSIONS ARE MEASURED INSIDE CURB TO INSIDE CURB. THE WIDTH IS HINGE TO LATCH AND LENGTH IS HINGED SIDE.

ROOF HATCH SIZE 36" (WIDTH) x 30" (LENGTH)



Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

Approved By: _____ Date: _____

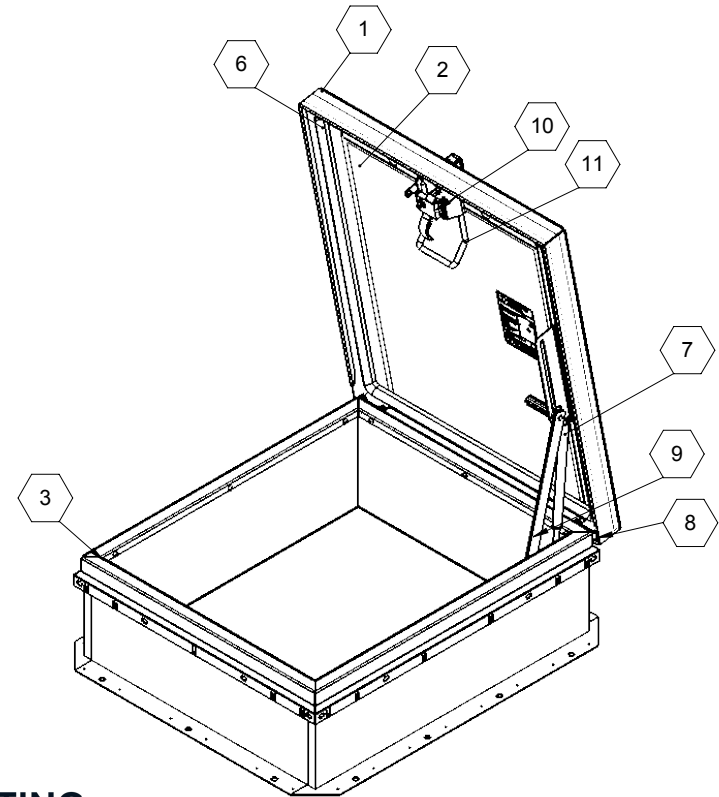



MIAMI-DADE COUNTY
APPROVED

MIAMI DADE ACCEPTANCE NO: 21-1201.02
EXPIRATION DATE: 5/25/2027

TEST CERTIFICATIONS:



TAS201-94 IMPACT TEST - CLASS IV
TAS202-94 UNIFORM STATIC AIR PRESSURE
TAS203-94 CYCLE WIND PRESSURE LOAD

PROJECT:					
ARCHITECT:					
CONTRACTOR:					
QTY:					
PART#:				BA3630	
				TITLE:	
				BRHUA36X30S1T Roof Hatch, Personnel, 36x30, S Dr, Zinc Hdw, Alum, Mill, Sngl Wall Curb	
	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	DWO	1/3/22	A	Babcock RH BA3630 ShpDr	A
RELEASED	DWO	1/3/22	WEIGHT: 73.4 LBS	SHEET 1 OF 2	

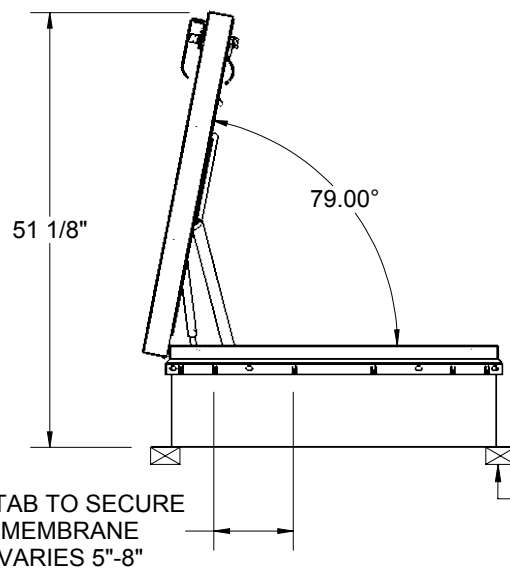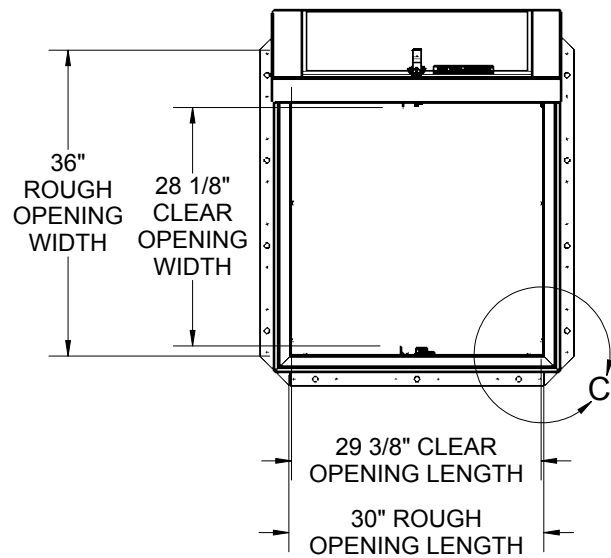

EZ TAB TO SECURE
MEMBRANE
VARIES 5"-8"

WOOD, CONCRETE, OTHER
MATERIAL FOR MOUNTING
BY OTHERS (NIC)

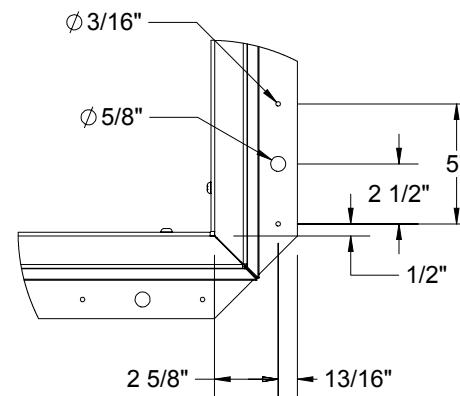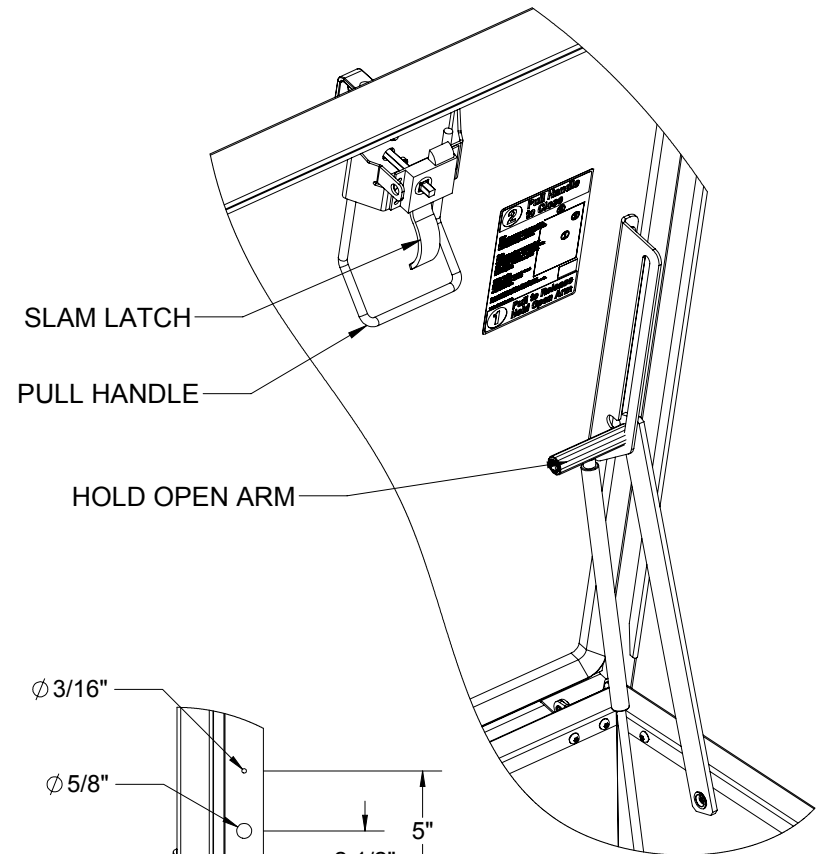

DETAIL C
SCALE 1 : 8



TITLE: BRHUA36X30S1T
Roof Hatch, Personnel,
36x30, S Dr, Zinc Hdw, Alum, Mill, Sngl Wall Curb

	NAME	DATE	SIZE	DWG. NO.	REV
DRAWN	DWO	1/3/22	A	Babcock RH BA3630 ShpDr	A
RELEASED	DWO	1/3/22		WEIGHT: 73.4 LBS	

SHEET 2 OF 2