


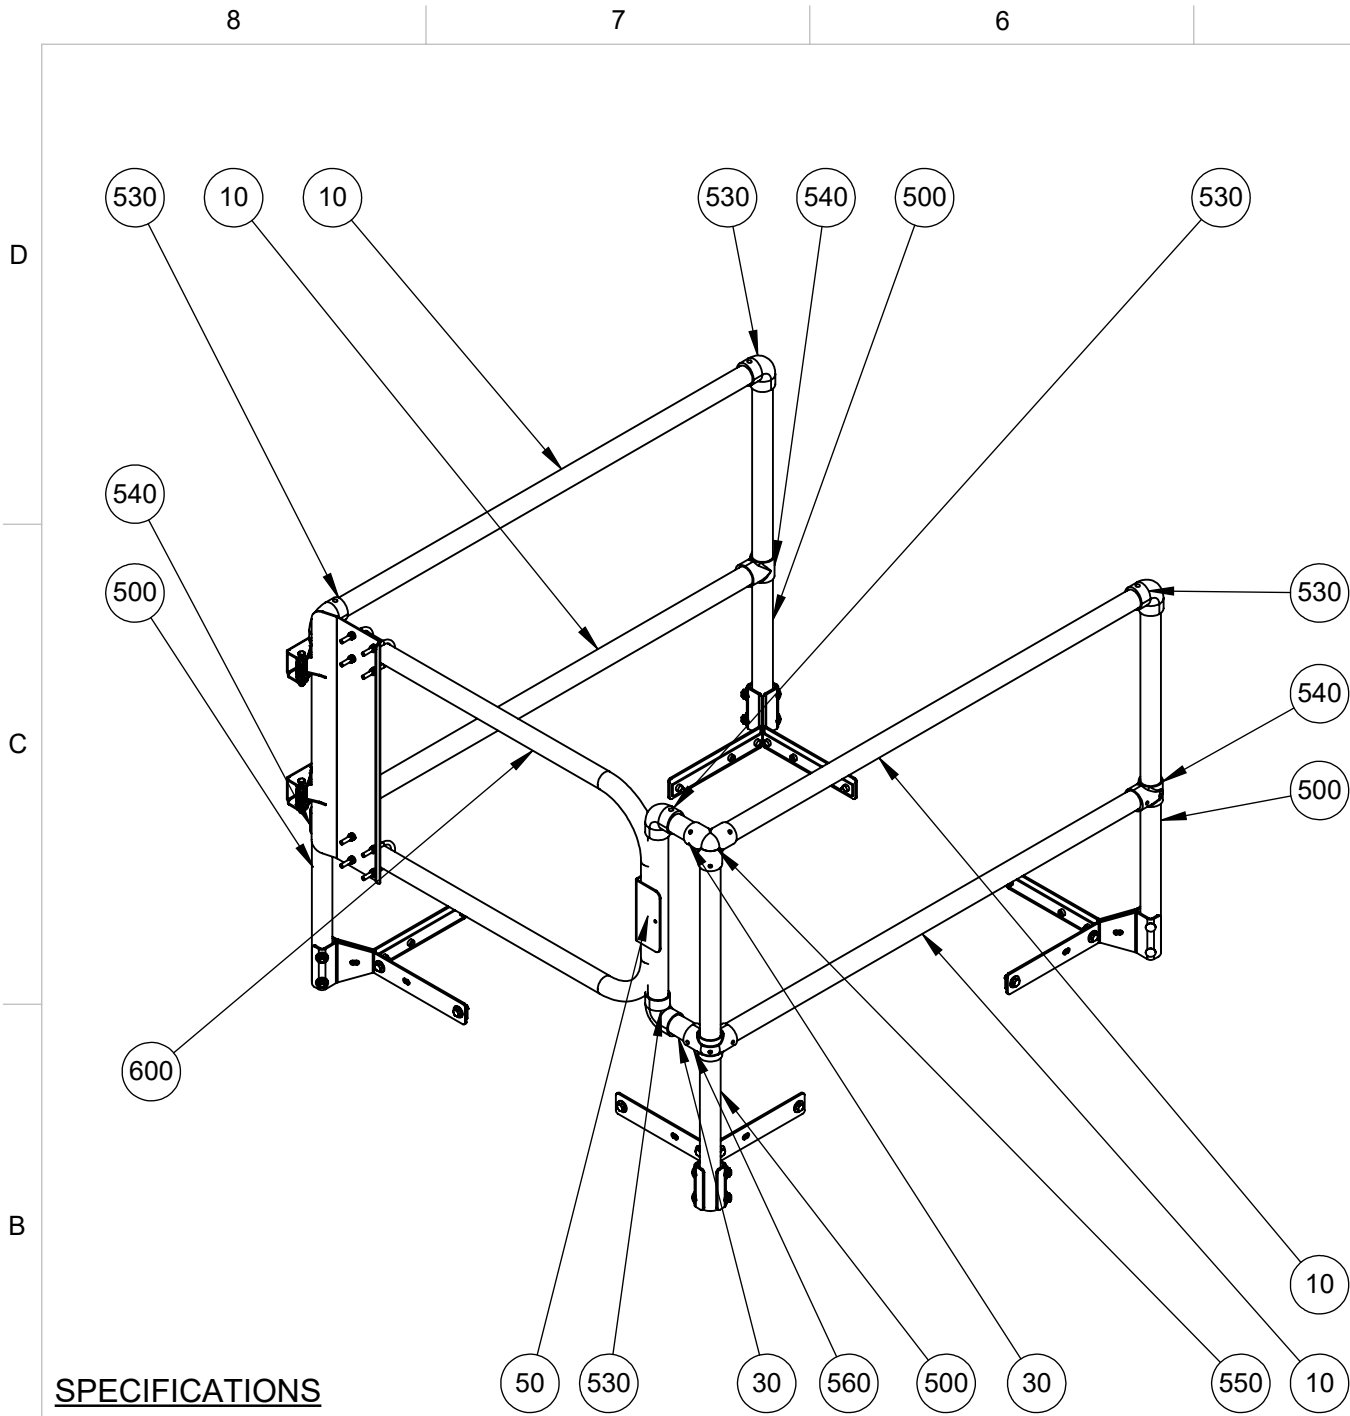

SPECIFICATIONS

RAILS, POSTS: 6061 T6 ALUMINUM ALLOY 1 1/4" I.D. SCH 40

GATE: 1 1/4" TUBULAR ALUMINUM SELF CLOSING WITH COIL SPRING, ZINC PLATED

COUNTERFLASH MOUNTING BRACKETS: 3/16" ZINC PLATED STEEL FASTENED TO STEELBACKING PLATE

BOLTS: HEX HEAD BOLTS 3/8"-16 x 3/4" GRADE 5 ZINC PLATED

RAILING FITTINGS AND PLUGS: MANUFACTURER'S STANDARD CAST WITH SET SCREW HOLD

FITS HATCH SIZES UP TO 36" X 30"

CERTIFICATIONS: MEETS OSHA 29 CFR 1910.28 AND 1910.29 REQUIREMENTS


FINISH: SAFETY YELLOW POWDER COAT



Please review and then sign and date this page indicating your approval that the details are accurate and you would like to proceed with this order. Once received, the product(s) will be scheduled for production. All orders are non-cancelable, non-refundable and non-returnable.

Approved By: _____ Date: _____

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
10	27496-48.75-Y	RAIL, 1-1/4" X 48.75L, ALUM	4
20	-	-	-
30	27496-4.00-Y	RAIL, 1-1/4" X 4.00L, ALUM	2
40	-	-	-
50	27496-18.00-Y	RAIL, 1-1/4" X 18.00L, ALUM	1
60	-	-	-
500	27180-A-Y	PKG, CORNER POST, ALUM,	4
510	-	-	-
520	-	-	-
530	27185	FTG, ELBOW,	5
540	27188	FTG, TEE,	3
550	27231	FTG, DBL TEE,	1
560	27186	FTG, CROSS ELBOW,	1
570	-	-	-
580	-	-	-
590	-	-	-
600	SRCAY-GATE-30	GATE, 30,	1

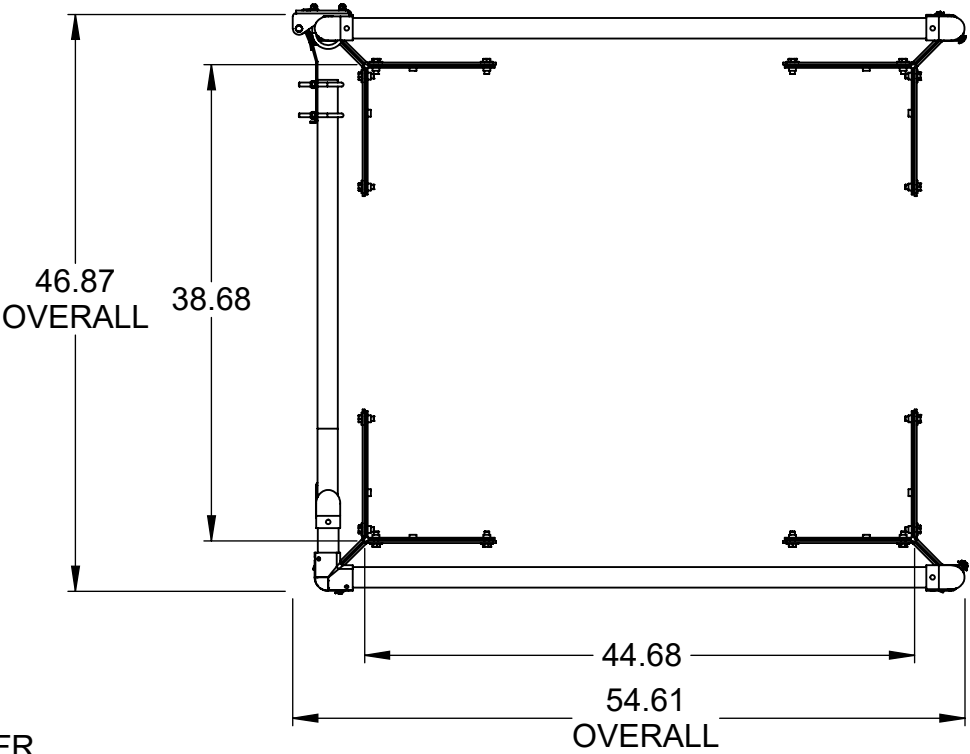

SRBAY36X30FG



TITLE:				Safety Railings for Roof Hatch 36x30, Front Exit, Therm-Brokn Aluminum, Safety Yellow Pwd, Self Closing Gate,	
SIZE	DWG. NO.	REV			
B	Babcock SRBAY36X30FG	A			
WEIGHT: 71.5		SHEET 1 OF 1			